

# REGION V PLANNING & DEVELOPMENT COMMISSION

The State of Michigan
Transportation Asset Management Council
2007 PASER Survey
Of
Lapeer County

Prepared by the Genesee County Metropolitan Planning Commission Staff

## The State of Michigan Transportation Asset Management Council 2007 PASER Road Survey Lapeer County

#### **Project overview:**

On August 6, 7 and 8, 2007, GLS Region V staff along with representatives of the Lapeer County Road Commission (LCRC) and the Michigan Department of Transportation (MDOT) assessed the condition of Lapeer County federal aid eligible roads using the PASER road rating system as requested by the State of Michigan Asset Management Council.

#### **PASER** road rating system:

The PASER road rating system was developed by the University of Wisconsin-Madison Transportation Information Center to be used as the State of Wisconsin's standard road rating system. PASER is a "windshield" road rating system that uses a 0 to 10 rating scale, with a value of 10 representing a new road and a value of 0 representing a failed road. Condition ratings are assigned by monitoring the type and amount of visual defects along a road segment while driving the segment. The PASER system interprets these observations into a condition rating. PASER rating charts for asphalt, concrete and gravel roads have been included with this report.

The State of Michigan Asset Management Council has requested that the information gathered in this survey be reported using the following categories:

- Roads with PASER ratings of 8-10 require Routine Maintenance. Routine
  maintenance is the day-to-day maintenance activities that are scheduled, such as street
  sweeping, drainage clearing, shoulder gravel grading, and sealing cracks, to prevent
  standing water and water penetration.
- Roads with PASER ratings of 5-7 require Capital Preventive Maintenance. Capital
  preventive maintenance is a planned set of cost effective treatments to an existing
  roadway system and its appurtenances that preserves, retards future deterioration and
  maintains or improves the functional condition of the system without significantly
  increasing structural capacity. The purpose of capital preventive maintenance fixes is to
  protect the pavement structure, slow the rate of pavement deterioration and/or correct
  pavement surface deficiencies. Surface treatments are targeted at pavement surface
  defects primarily caused by the environment and by pavement material deficiencies.
- Roads with PASER ratings of 0-4 require Structural Improvements. This category
  includes work identified as rehabilitation and reconstruction, which address the structural
  integrity of a road.

#### **Computer Equipment and Software:**

Staff collected data using a laptop computer with the RoadSoft GIS Laptop Data Collector 6.5 software loaded. A Garmin GPS 35/36 TracPak GPS unit was connected to the laptop to track position and locate road segments. Note: Please contact RoadSoft staff for questions regarding a specific GPS units' compatibility with the RoadSoft program. RoadSoft GIS is an asset management software package created and distributed free of charge by the Michigan

Technology Institute's Technology Development Group. The current version of the program was designed with a special module to collect PASER rating data.

#### Staff Time:


3 staff members is the optimal amount to use for collecting PASER data. One drives, one navigates and rates the roads, and the third staff member enters information into the computer. For the Lapeer County road rating project there was always one Region V representative, one LCRC representative, and one MDOT representative present. It took 20.5 hours to rate approximately 475.41 miles of road.


#### Training:


All participants in the survey were required to attend a daylong training session at the Hannah Community Center in East Lansing, Michigan, on March 21, 2007. Participants received an overview of the project and were given instruction on how to use the RoadSoft software and the PASER road rating system for data collection. Once out in the field, experienced staff members taught the new participants how to use the RoadSoft program and guided them through the rating process. Most participants felt comfortable after an hour of working the computer and rating the roads.

#### **Overview of the Federal Aid Network:**

The Lapeer County Federal Aid network is comprised of 475.41 road miles. Of the total miles, 441.0 road miles are within Townships, which are under the jurisdiction of the Lapeer County Road Commission (LCRC). Of the total roads surveyed, 411.7 miles (87%) were Asphalt, 63.7 miles (13%). Local Road agencies with the greatest amount of federal aid miles within their jurisdiction are the LCRC with 441.0 miles, MDOT with 136.0 miles and the City of Lapeer with 14.383 miles of federal aid roads.

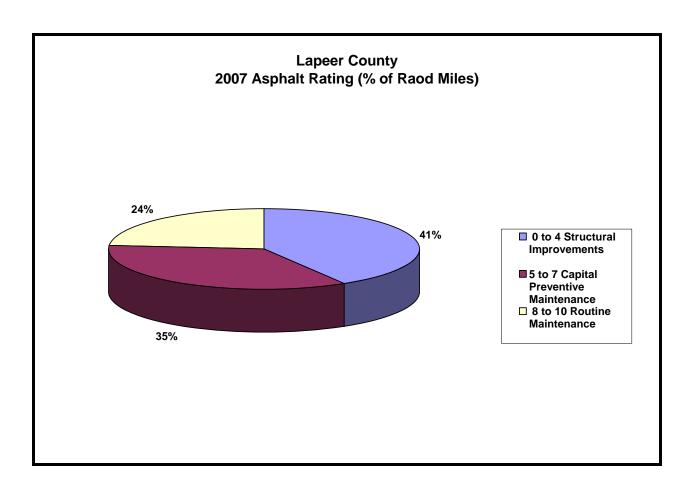

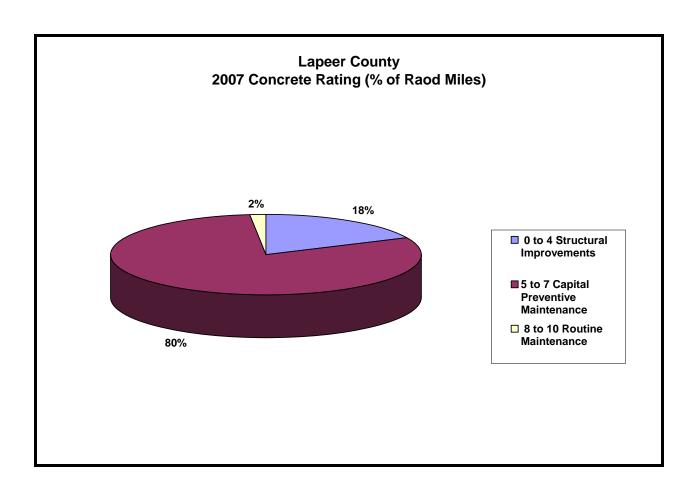

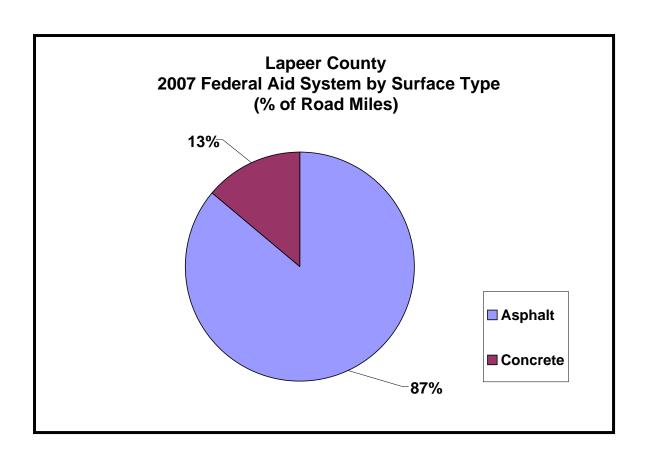

					% of PASER
				Total	Miles in
Description	0 to 4	5 to 7	8 to 10	Miles	Juridiction
Almont	0.80	0.21	0.00	1.01	0.21%
Almont Twp	4.03	13.86	3.56	21.45	4.51%
Arcadia Twp	3.45	12.70	0.00	16.15	3.40%
Attica Twp	20.26	15.53	2.51	38.30	8.06%
<b>Burlington Twp</b>	9.57	6.75	2.59	18.92	3.98%
Burnside Twp	5.98	11.92	9.12	27.01	5.68%
Clifford	1.91	0.76	0.00	2.68	0.56%
Columbiaville	0.31	1.86	0.08	2.24	0.47%
Deerfield Twp	13.80	0.50	10.37	24.67	5.19%
Dryden	1.02	0.00	0.00	1.02	0.21%
Dryden Twp	7.41	4.50	2.00	13.91	2.93%
Elba Twp	15.73	20.74	2.74	39.21	8.25%
Goodland Twp	2.49	8.25	8.98	19.72	4.15%
Hadley Twp	3.73	7.17	5.41	16.31	3.43%
Imlay City	2.64	5.44	0.17	8.25	1.74%
Imlay Twp	12.13	17.48	3.67	33.28	7.00%
Lapeer	6.32	9.47	0.65	16.43	3.46%
Lapeer Twp	16.98	19.99	11.22	48.19	10.14%
Marathon Twp	9.10	9.43	0.00	18.53	3.90%
Mayfield Twp	11.46	3.00	11.48	25.93	5.45%
Metamora	1.28	0.00	0.00	1.28	0.27%
Metamora Twp	1.12	6.76	12.20	20.08	4.22%
North Branch	0.50	0.00	0.00	0.50	0.10%
North Branch Twp	7.07	7.46	2.97	17.49	3.68%
Oregon Twp	12.59	10.04	0.00	22.64	4.76%
Otter Lake	0.08	0.00	0.89	0.97	0.20%
Rich Twp	10.52	1.40	7.32	19.24	4.05%
Total	182.26	195.20	97.91	475.37	100%

<sup>\*\*\*</sup> Township Federal Aid roads are under the Jurisdiction of the Lapeer County Road Commission

#### Results:


Approximately 475.37 lane miles of federal aid eligible roads were rated for this project. The project was completed in 20.5 hours with an average rating speed of 23 miles per hour. The Chart on the following page summarizes the distribution of ratings by mileage and percentage of the total for all roads rated in the project. 97.91 miles (20.6%) of the roads rated received a rating of 8 or better, 195.20 miles (41%) of the roads rated received a rating of 5, 6 or 7 and 182.26 miles (38.3%) received a rating less than or equal to 4. The Asset Management Council has prescribed a fix for each of the PASER rating categories:

- Roads receiving a rating of 8 or better require only Routine Maintenance

- Roads receiving a rating of 5-7 require Capital Preventive Maintenance
- Roads receiving a rating less than or equal to 4 require Structural Improvements

<b>PASER Rating</b>	Prescribed Fix	Miles	Percent of Total Miles Rated
10 – 8	Routine Maintenance	97.91	20.60%
7 – 5	Capital Preventive Maintenance	195.20	41.06%
4 – 1	Structural Improvements	182.26	38.34%

The following charts summarize the distribution of ratings by mileage for all roads rated in the project.

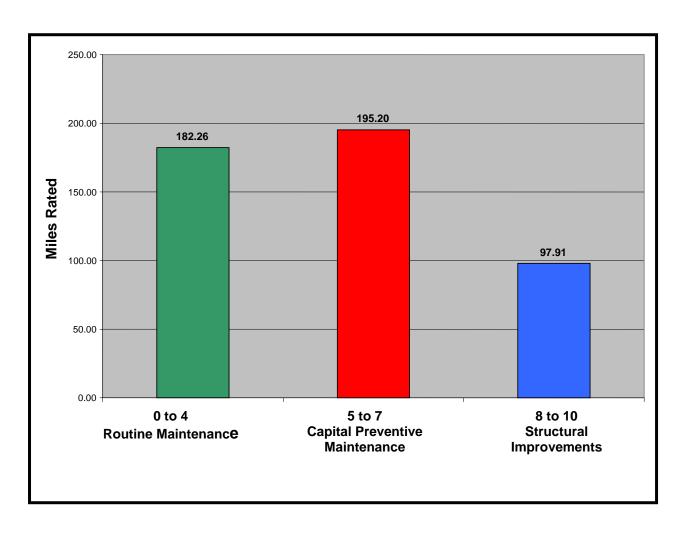

The following tables provide a summary of the 2007 PASER survey rating by surface type by Jurisdiction.

	2007 PASER Surface Rating by Surface Type							
0 to 4 5 to 7 8 to 10 Total Roa								
Description	PASER Rating	PASER Rating	PASER Rating	Miles				
Asphalt	170.82	144.09	96.78	411.69				
Concrete	11.45	51.10	1.13	63.68				
Undefined	0.04	0.00	0.00	0.04				
Total	182.26	195.20	97.91	475.37				
Percentage	38.34%	41.06%	20.60%	100.00%				

	2007 PASER S	Surface Rating by Ju	risdiction	
Jurisdictions	0 to 4 PASER Rating (miles)	5 to 7 PASER Rating (miles)	8 to 10 PASER Rating (Miles)	Total Road Miles
Almont	0.80	0.21	0.00	1.01
Clifford	1.91	0.76	0.00	2.68
Columbiaville	0.31	1.86	0.08	2.24
Dryden	1.02	0.00	0.00	1.02
Imlay City	2.64	5.44	0.17	8.25
Lapeer	6.32	9.47	0.65	16.43
Metamora	1.28	0.00	0.00	1.28
North Branch	0.50	0.00	0.00	0.50
Otter Lake	0.08	0.00	0.89	0.97
LCRC	167.41	177.46	96.12	441.00
MDOT	11.755	75.275	49.02	136.05
Total	182.303	195.196	97.914	475.413
Percentage	38.35%	41.06%	20.60%	100%

	2007 LCRC Surface Rating by Township							
Jurisdiction	0 to 4 PASER Rating (miles)	5 to 7 PASER Rating (miles)	8 to 10 PASER Rating (Miles)	Total Road Miles				
Almont Twp	4.03	13.86	3.56	21.45				
Arcadia Twp	3.45	12.70	0.00	16.15				
Attica Twp	20.26	15.53	2.51	38.30				
Burlington Twp	9.57	6.75	2.59	18.92				
Burnside Twp	5.98	11.92	9.12	27.01				
Deerfield Twp	13.80	0.50	10.37	24.67				
Dryden Twp	7.41	4.50	2.00	13.91				
Elba Twp	15.73	20.74	2.74	39.21				
Goodland Twp	2.49	8.25	8.98	19.72				
Hadley Twp	3.73	7.17	5.41	16.31				
Imlay Twp	12.13	17.48	3.67	33.28				
Lapeer Twp	16.98	19.99	11.22	48.19				
Marathon Twp	9.10	9.43	0.00	18.53				
Mayfield Twp	11.46	3.00	11.48	25.93				
Metamora Twp	1.12	6.76	12.20	20.08				
North Branch Twp	7.07	7.46	2.97	17.49				
Oregon Twp	12.59	10.04	0.00	22.64				
Rich Twp	10.52	1.40	7.32	19.24				
Total Townships	167.41	177.46	96.12	441.00				


To obtain a digital copy of the data collected in this study each Local Road Agency must submit a written request to GLS Region V staff. The data will be distributed as a RoadSoft GIS file, so each LRA must also obtain a copy of the latest Roadsoft GIS program from Michigan Tech prior to using the data.

A set of color thematic maps depicting the 475.37 miles of federal aid eligible roads rated for this project are provided in the back of this report.


#### **Updating the ratings:**

According to the new Governmental Accounting Standards Board Statement 34 (GASB 34), governmental units receiving, or applying for federal money must assess the condition of their roads at least once every three years. This project continues to provide the foundation to meet the requirements of GASB 34 and continues to demonstrate that it can be accomplished with minimal staff in a relatively short period of time.

#### Comparisons: 2003 to 2007 Lapeer County PASER Evaluation:

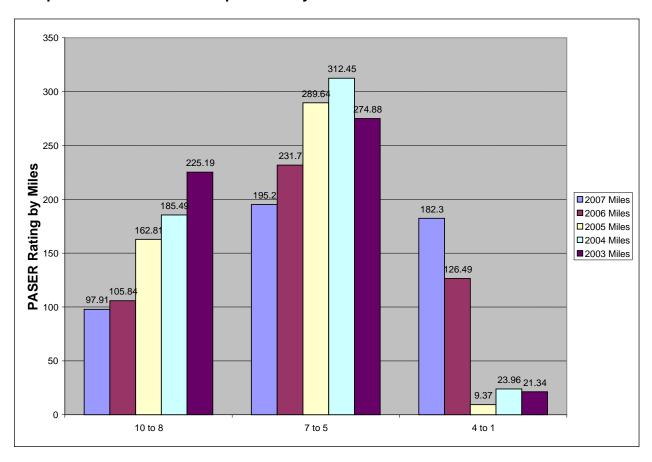

<sup>\*\*\* 2005, 2006</sup> and 2007 data does not include gravel roads
\*\*\* 2006 and 2007 include rutting consideration in rating

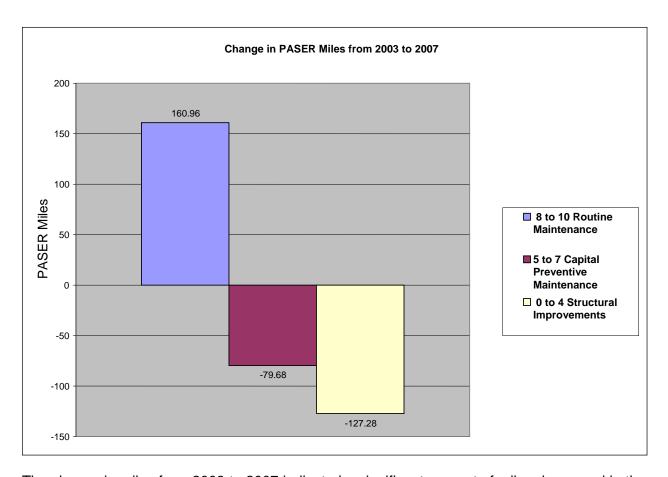

The change in miles from 2003 to 2007 indicated a significant amount of miles decreased in the Routine Maintenance and Capital Preventive Maintenance and an increase in miles under the Structural Improvement category.

- In 2007, 38% or 182.3 miles of the Federal Aid Road system are in the PASER Rating Category of 4 to 0. Roads with 0 to 4 ratings require structural improvements that include full depth repairs, major overlay or reconstruction. This is an increase of 160.96 miles (837%) as compared to the 2003 rating distribution in the same category.
- In 2007, 41% or 195.2 miles of the Federal Aid Road system are in the PASER Rating Category of 5 to 7. Roads with 5 to 7 ratings require some partial depth joint repairs, seal coat or crack filling. This is a decrease of 79.68 miles (22%) as compared to the 2003 rating distribution in the same category.
- In 2007, 21% or 97.91 miles of the Federal Aid Road system are in the PASER Rating Category of 8 to 10. Roads with 8 to 10 ratings require little or no maintenance. This is a decrease of 127.28 miles (52%) as compared to the 2003 rating distribution in the same category.

In general, this comparison indicates an increased need for Structural Improvements and Capital/Preventive Maintenance improvements in Lapeer County, as a whole. The difference in the significant increase and decrease is partly due to the more detailed rating process. In 2006, rutting was given greater consideration compared to previous years and the surveyors slowed the vehicles speed down and took a closer look at the


distresses. Rutting is located in the wheel path and is considered to be functional and structural types of distress. In 2006, rutting severity of .5 to 1.0 inch was automatically starts at a 4 rating.


The following tables compare PASER Rating Categories, miles rated, and Percentage of miles from 2003, 2004, 2005, 2006 and 2007 PASER survey for each Lapeer County jurisdiction and the Lapeer County as a whole.

ALMONT	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	0	0.21	0.14	0.52	0.06	-0.06
7 to 5	0.21	0.61	0.84	0.5	0.95	-0.74
4 to 1	0.8	0.19	0	0	0	0.8
Total	1.01	1.01	0.99	1.02	1.01	0
CLIFFORD	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	0	0	0	1.47	1.91	-1.91
7 to 5	0.76	2.68	2.68	1.21	0.77	-0.01
4 to 1	1.91	0	0	0	0	1.91
Total	2.67	2.68	2.68	2.68	2.68	-0.01
COLUMBIAVILLE	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	0.08	0.58	0.92	0.92	1.69	-1.61
7 to 5	1.86	1.66	1.24	1.24	0.48	1.38
4 to 1	0.31	0	0.08	0.08	0.08	0.23
Total	2.25	2.24	2.24	2.24	2.24	0.01
DRYDEN	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	0	0	0	0	0	0
7 to 5	0	0	1.02	1.02	1.02	-1.02
4 to 1	1.02	1.02	0	0	0	1.02
Total	1.02	1.02	1.02	1.02	1.02	0


						Change in Miles from 2003 to
IMLAY CITY	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	2003 to
10 to 8	0.17	0	0.07	0.25	0	0.17
7 to 5	5.44	0.75	2.42	1.99	2.41	3.03
4 to 1	2.64	1.74	0	0.09	0.09	2.55
Total	8.25	2.49	2.49	2.32	2.49	5.76
LAPEER	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	0.65	0.87	1.83	4.27	3.53	-2.88
7 to 5	9.47	4.83	8.34	5.96	5.05	4.42
4 to 1	6.32	4.62	0.13	0	1.65	4.67
Total	16.44	10.32	10.31	10.23	10.23	6.21
METAMORA	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	0	0	0	0.33	0.33	-0.33
7 to 5	0	0.84	1.28	0.95	0.95	-0.95
4 to 1	1.28	0.43	0	0	0	1.28
Total	1.28	1.27	1.28	1.28	1.28	0
NORTH BRANCH	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	0	0	0	0	0	Miles from 2003 to 2007
10 to 8 7 to 5	0	0 0.5	0 0.5	0 0.44	0 0.5	Miles from 2003 to 2007 0 -0.5
10 to 8 7 to 5 4 to 1	0 0 0.5	0 0.5 0	0 0.5 0	0 0.44 0	0 0.5 0	Miles from 2003 to 2007 0 -0.5 0.5
10 to 8 7 to 5	0	0 0.5	0 0.5	0 0.44	0 0.5	Miles from 2003 to 2007 0 -0.5
10 to 8 7 to 5 4 to 1 Total	0 0 0.5 0.5	0 0.5 0 0.5	0 0.5 0 0.5	0 0.44 0 0.44	0 0.5 0 0.5	0 -0.5 0 Change in Miles from 2003 to
10 to 8 7 to 5 4 to 1 Total  OTTER LAKE	0 0 0.5 0.5	0 0.5 0 0.5	0 0.5 0 0.5	0 0.44 0 0.44 <b>2004 Miles</b>	0 0.5 0 0.5	0 -0.5 0 Change in Miles from 2003 to 2007
10 to 8 7 to 5 4 to 1 Total  OTTER LAKE 10 to 8	0 0.5 0.5 2007 Miles	0 0.5 0 0.5 <b>2006 Miles</b> 0.89	0 0.5 0 0.5 <b>2005 Miles</b> 0.95	0 0.44 0 0.44 <b>2004 Miles</b> 0.23	0 0.5 0 0.5 <b>2003 Miles</b> 0.23	Miles from 2003 to 2007  0 -0.5 0  Change in Miles from 2003 to 2007  0.66
10 to 8 7 to 5 4 to 1 Total  OTTER LAKE	0 0 0.5 0.5	0 0.5 0 0.5	0 0.5 0 0.5	0 0.44 0 0.44 <b>2004 Miles</b>	0 0.5 0 0.5	0 -0.5 0 Change in Miles from 2003 to 2007


LCRC	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	96.12	47.81	75.48	98.1	144.37	-48.25
7 to 5	177.46	158.68	218.72	242.64	200.16	-22.7
4 to 1	167.41	99.98	8.98	23.05	18.51	148.9
Total	440.99	306.47	303.18	363.79	363.03	77.96
MDOT	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	49.02	56.38	83.41	79.42	73.08	-24.06
7 to 5	75.28	61.15	52.6	56.51	62.61	12.67
4 to 1	11.76	18.52	0	0	0.36	11.4
Total	136.06	136.05	136.01	135.93	136.05	0.01
LAPEER COUNTY	2007 Miles	2006 Miles	2005 Miles	2004 Miles	2003 Miles	Change in Miles from 2003 to 2007
10 to 8	97.91	105.84	162.81	185.49	225.19	-127.28
7 to 5	195.2	231.7	289.64	312.45	274.88	-79.68
4 to 1	182.3	126.49	9.37	23.96	21.34	160.96

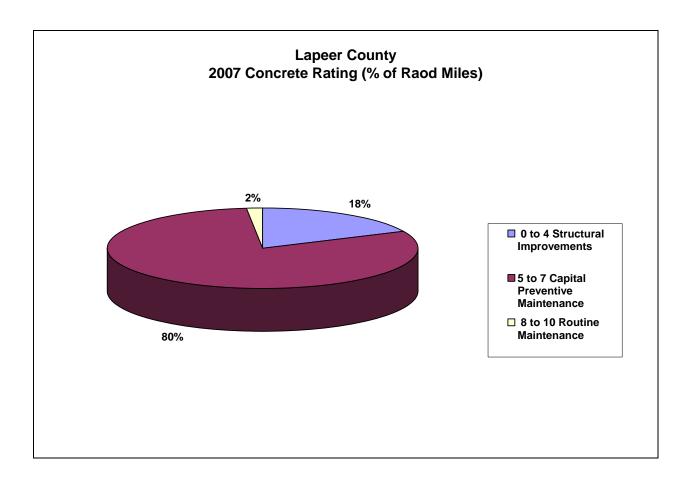


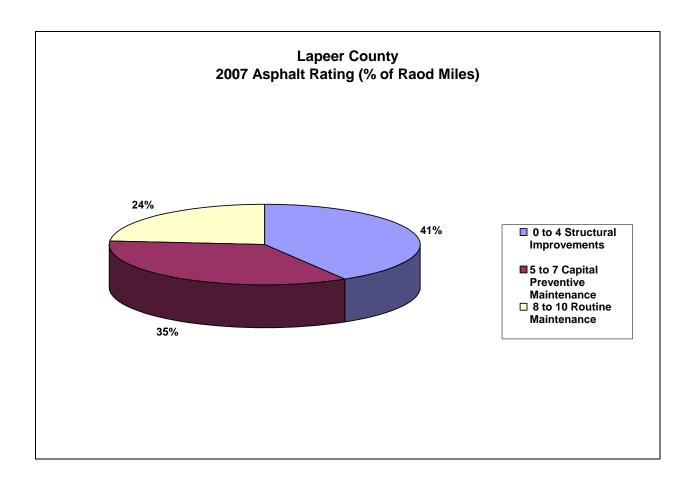



**PASER THEMATIC MAPS** 

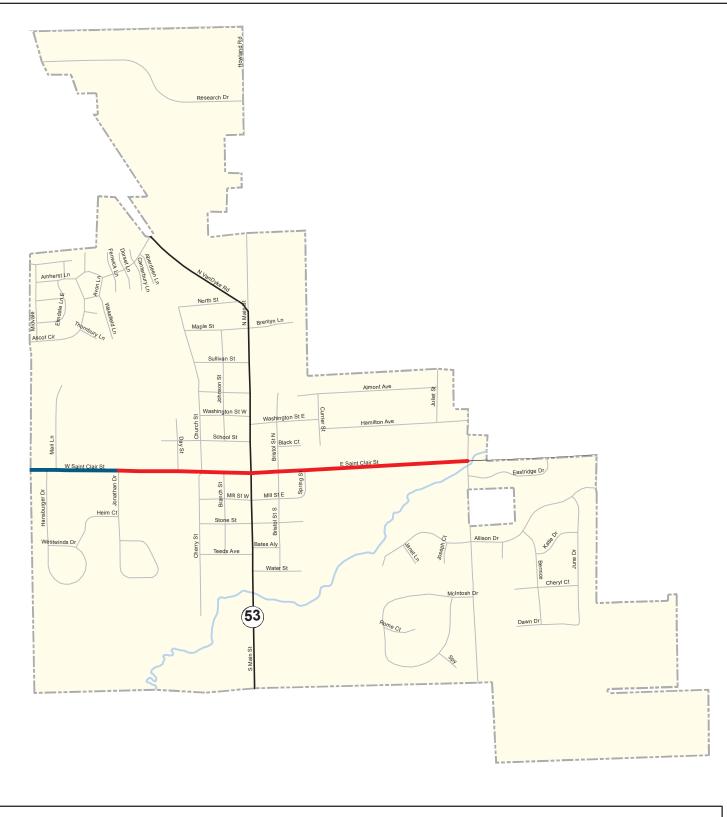


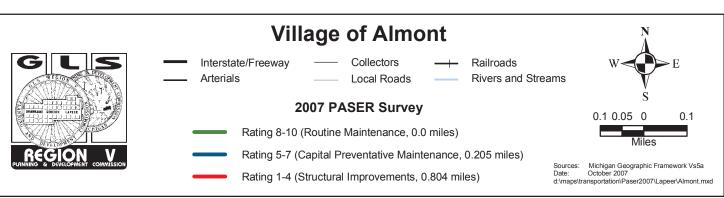


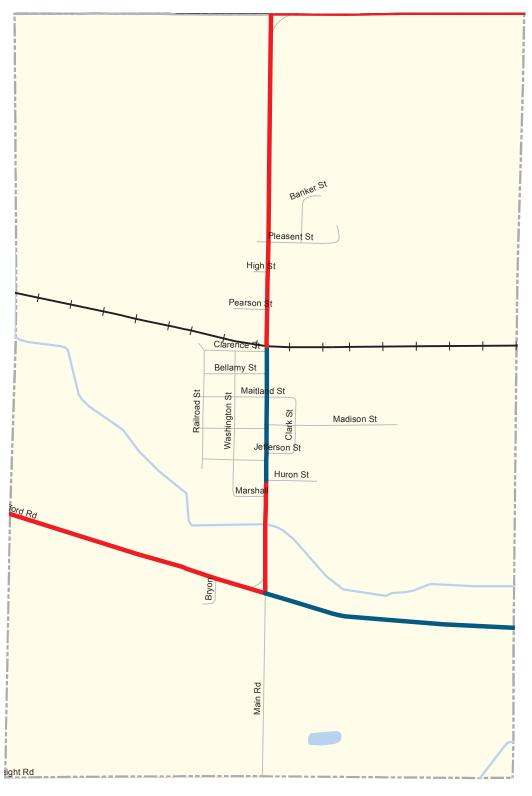


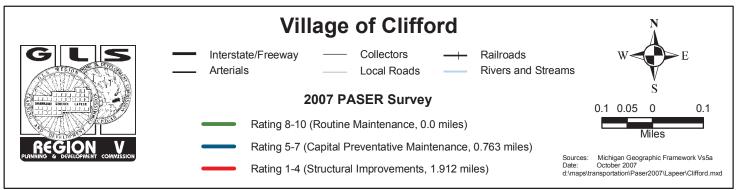


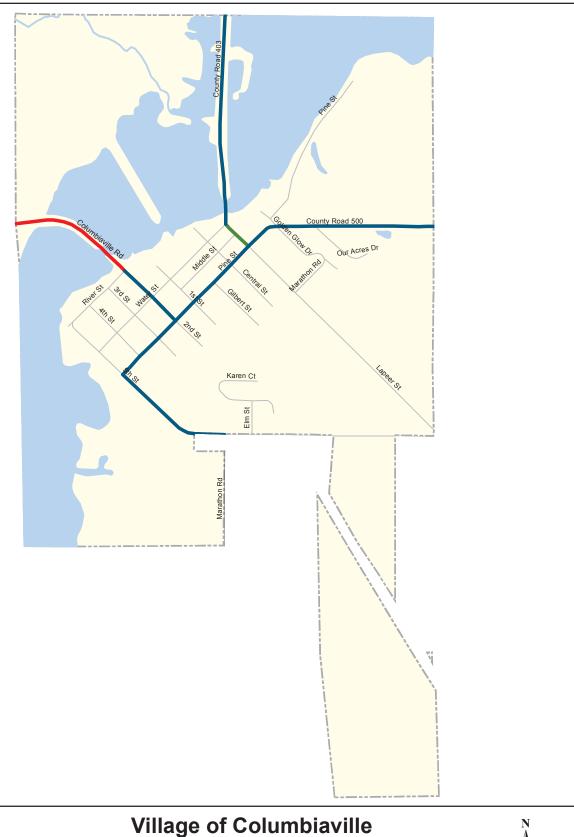


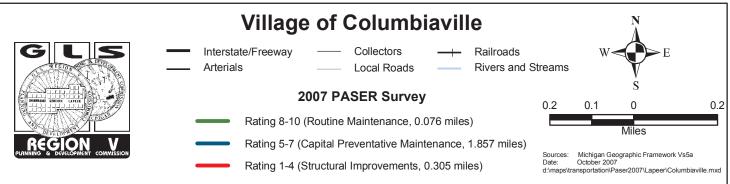


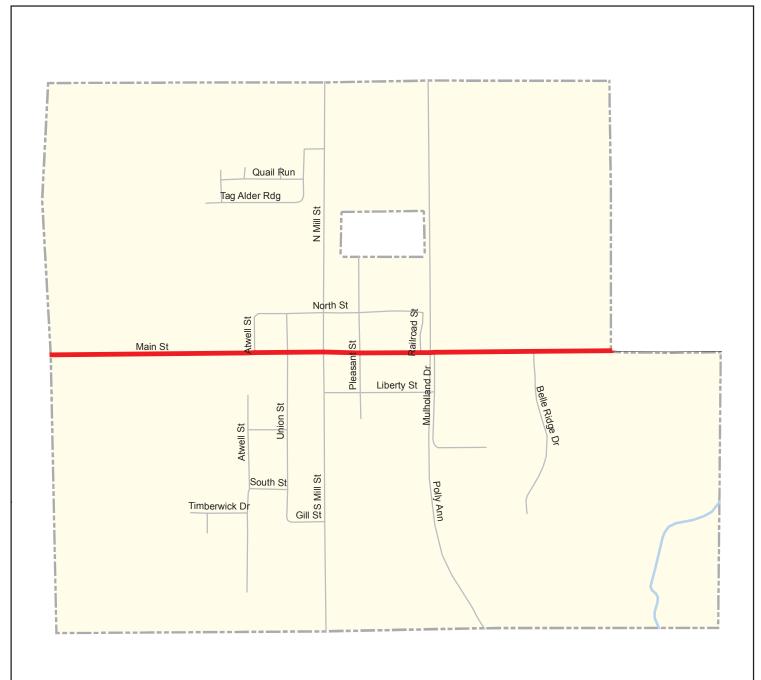


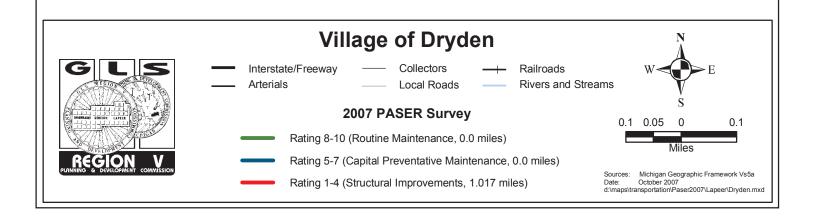


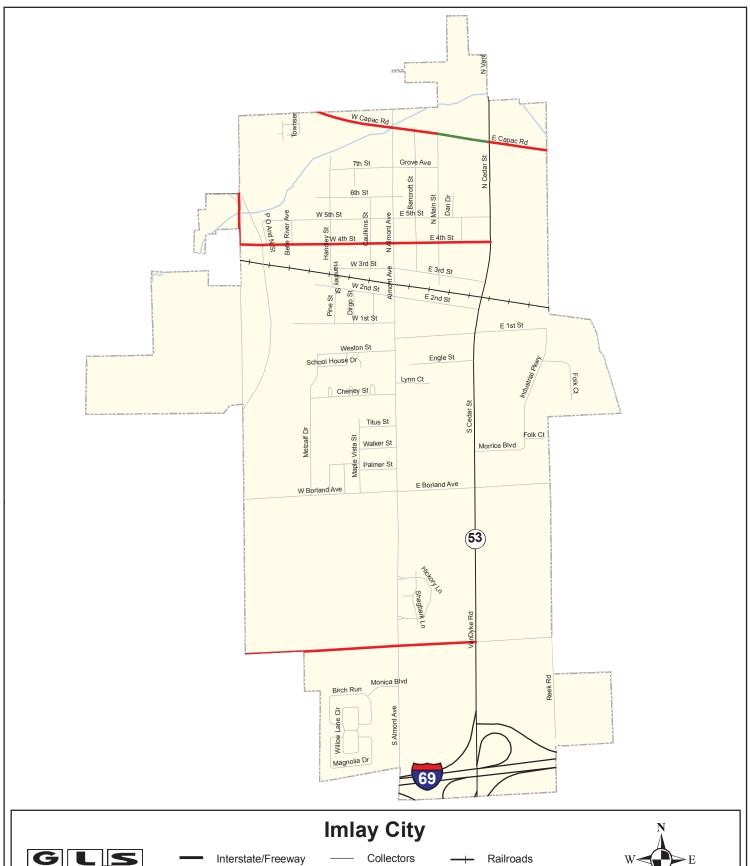


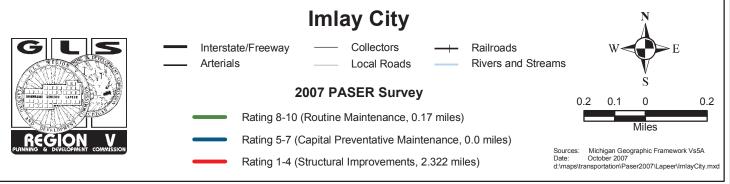


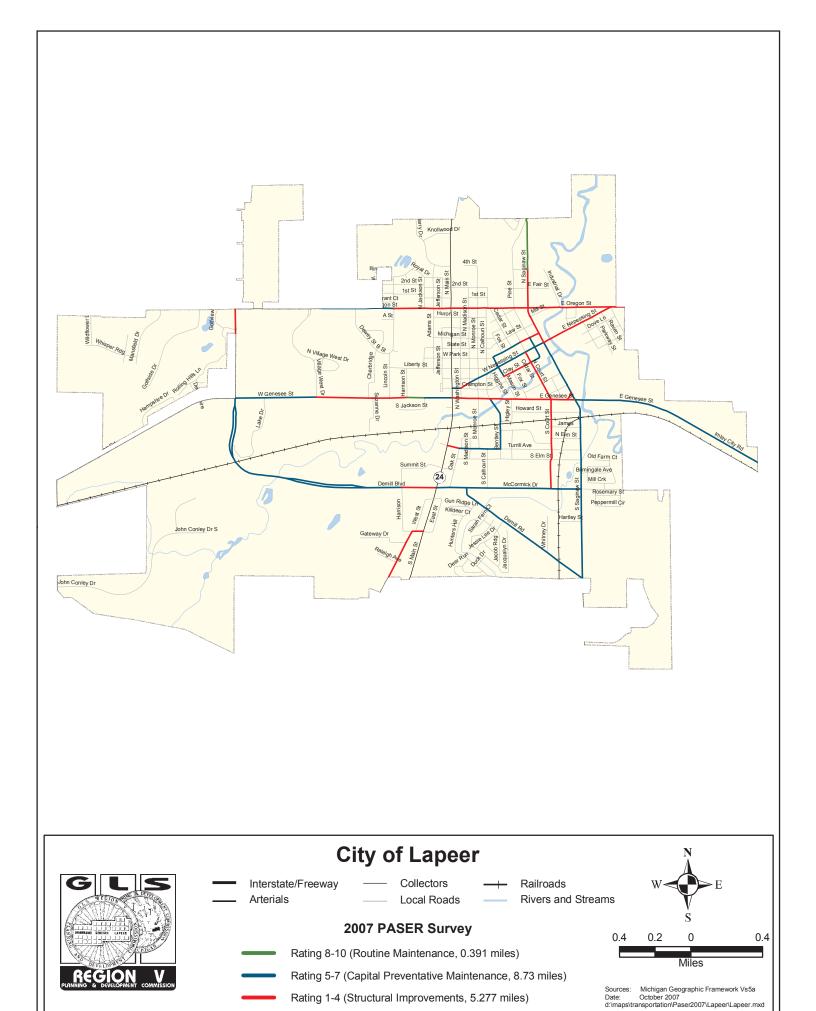

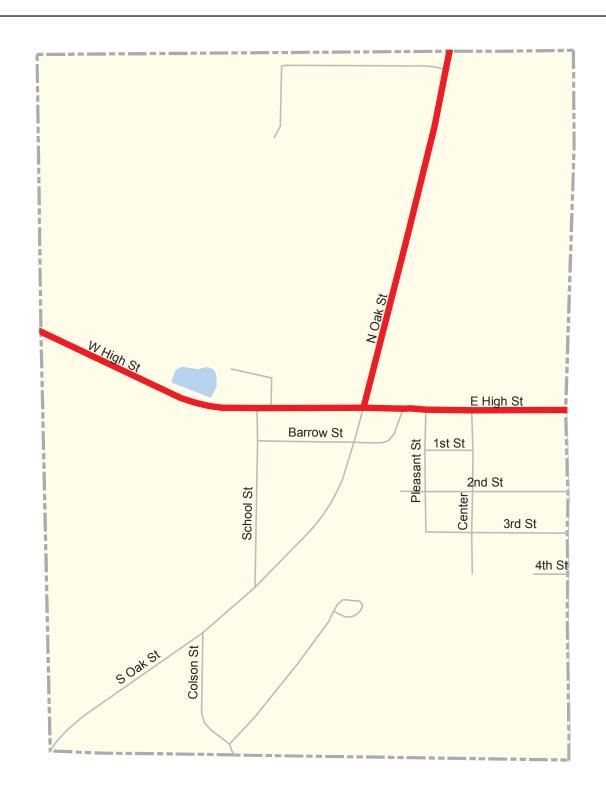


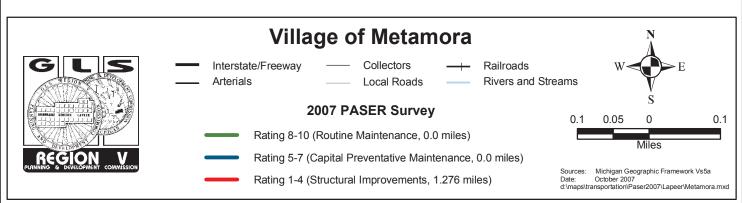


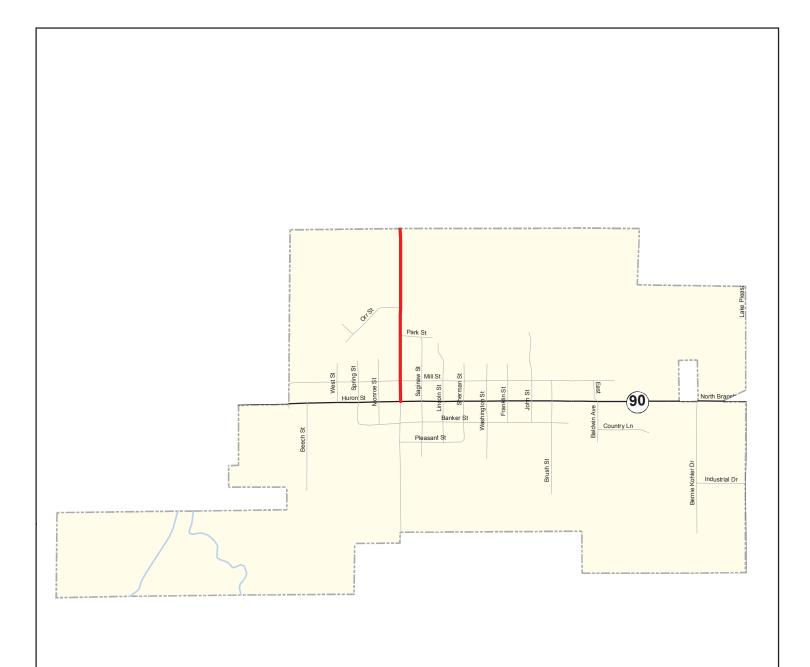


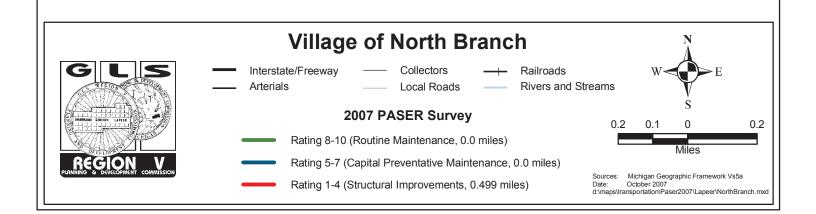




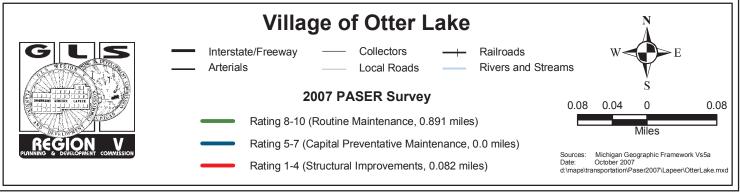

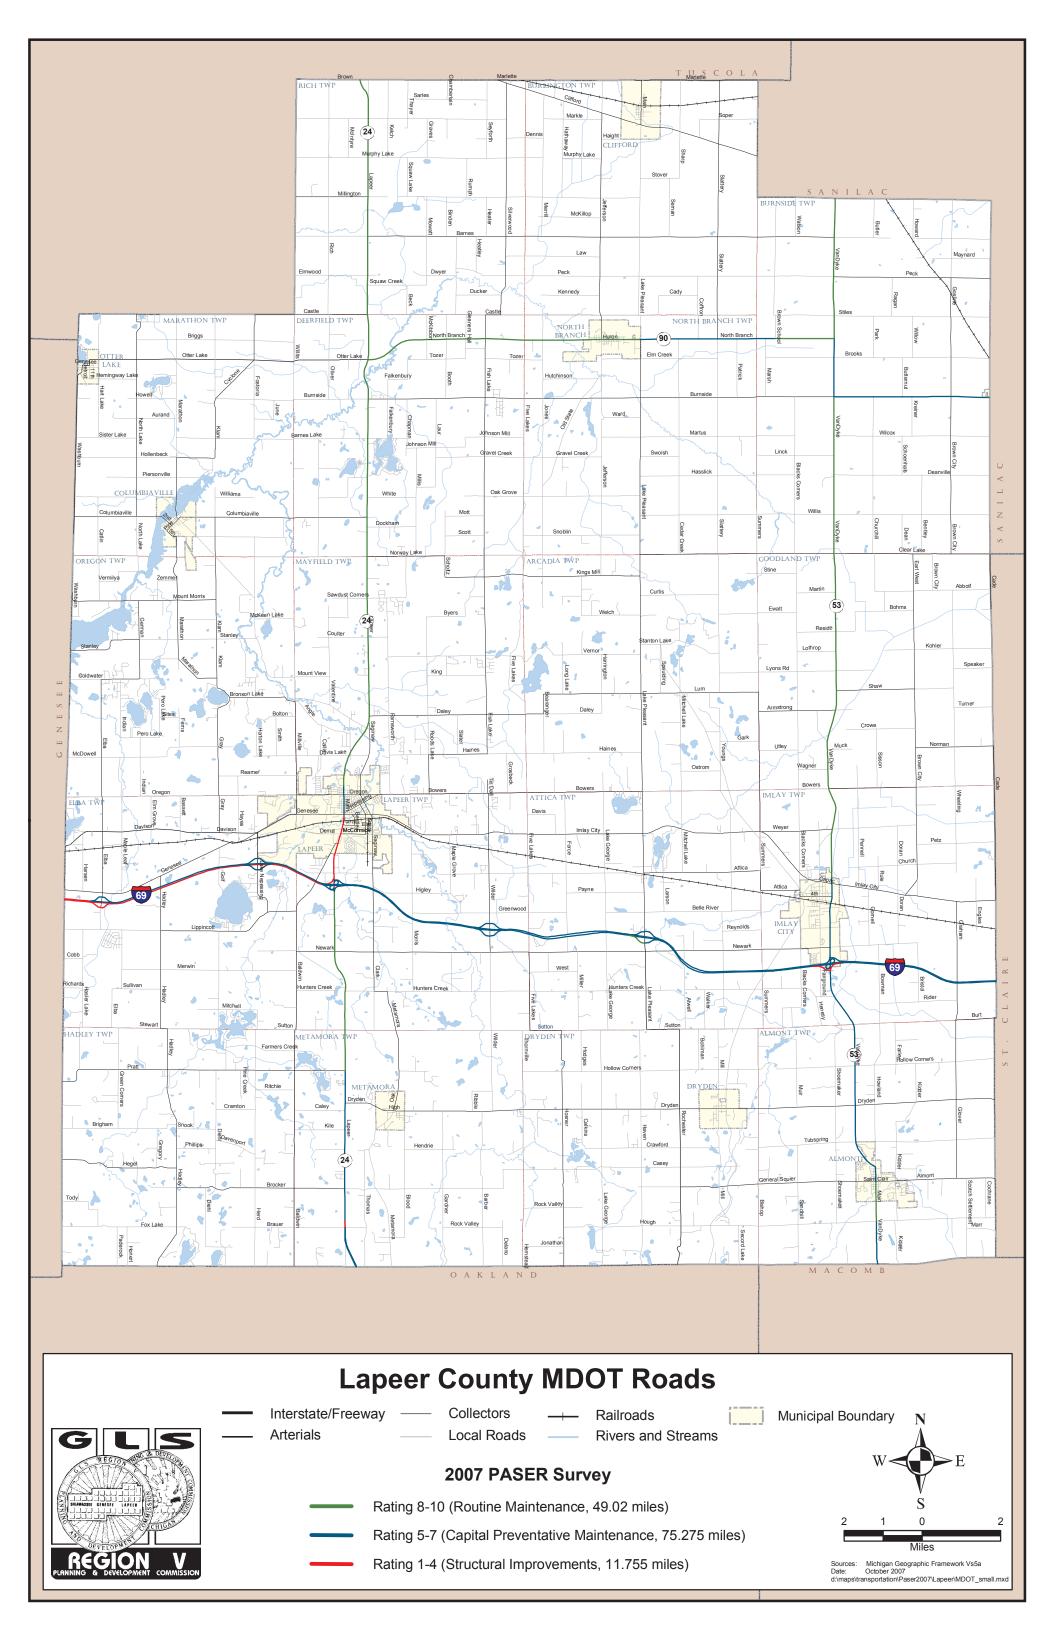

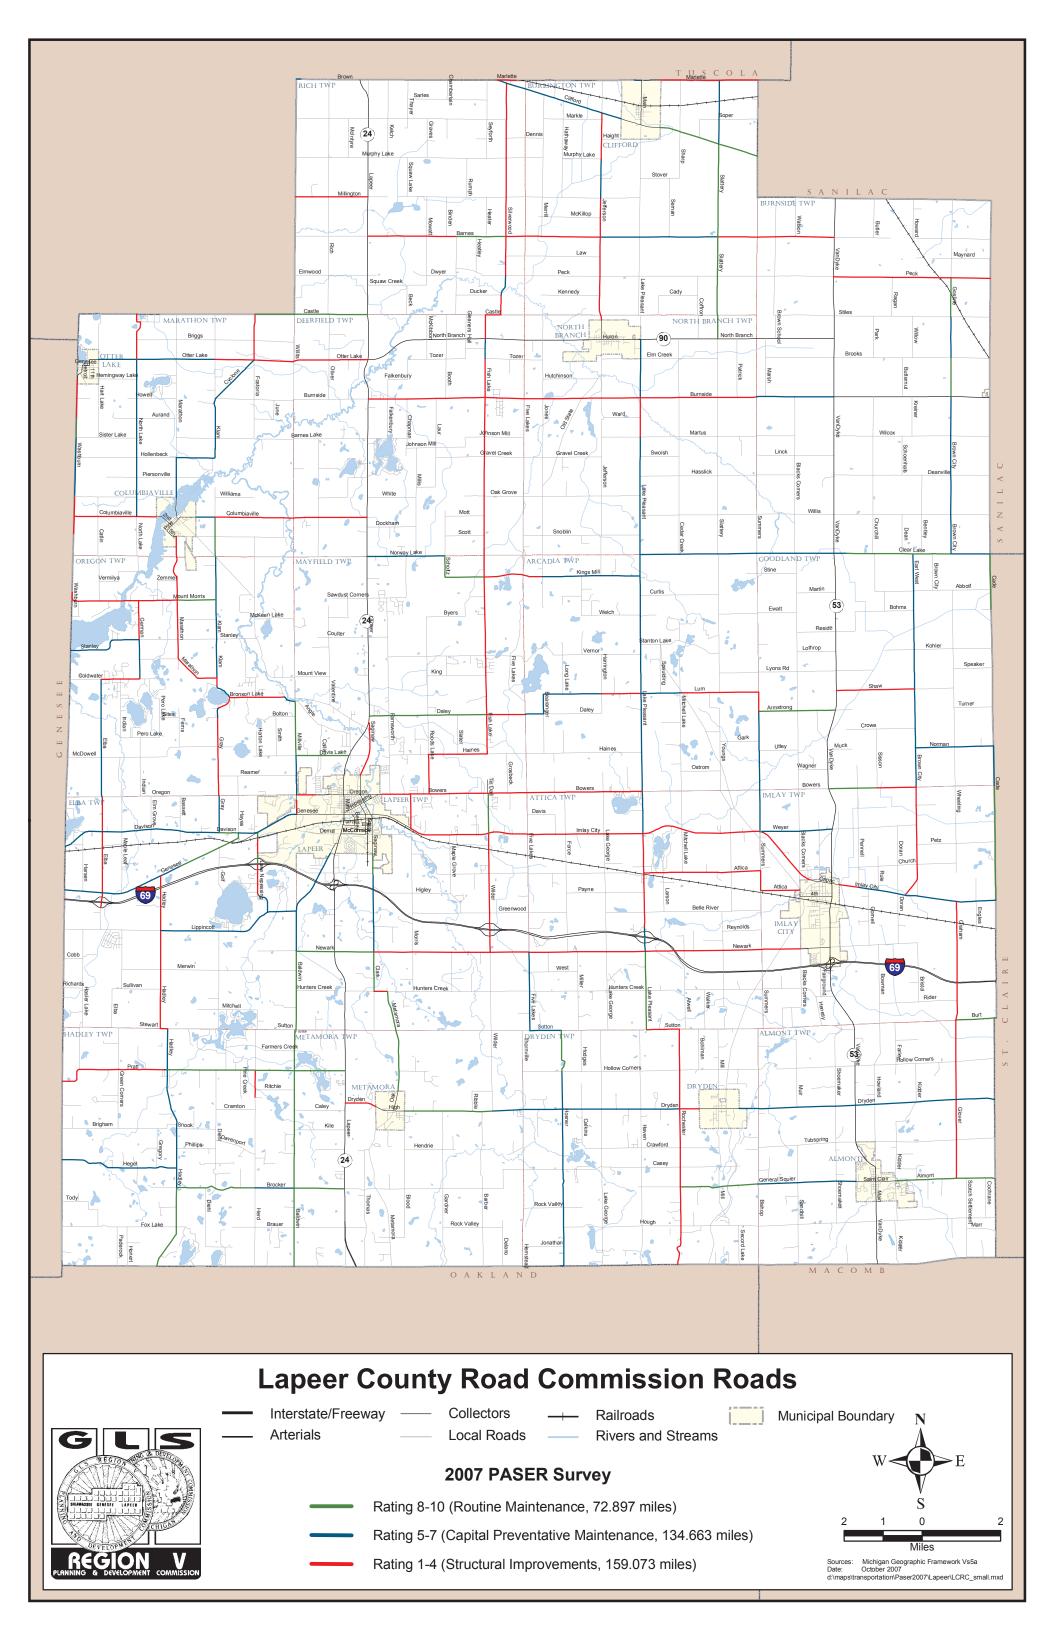

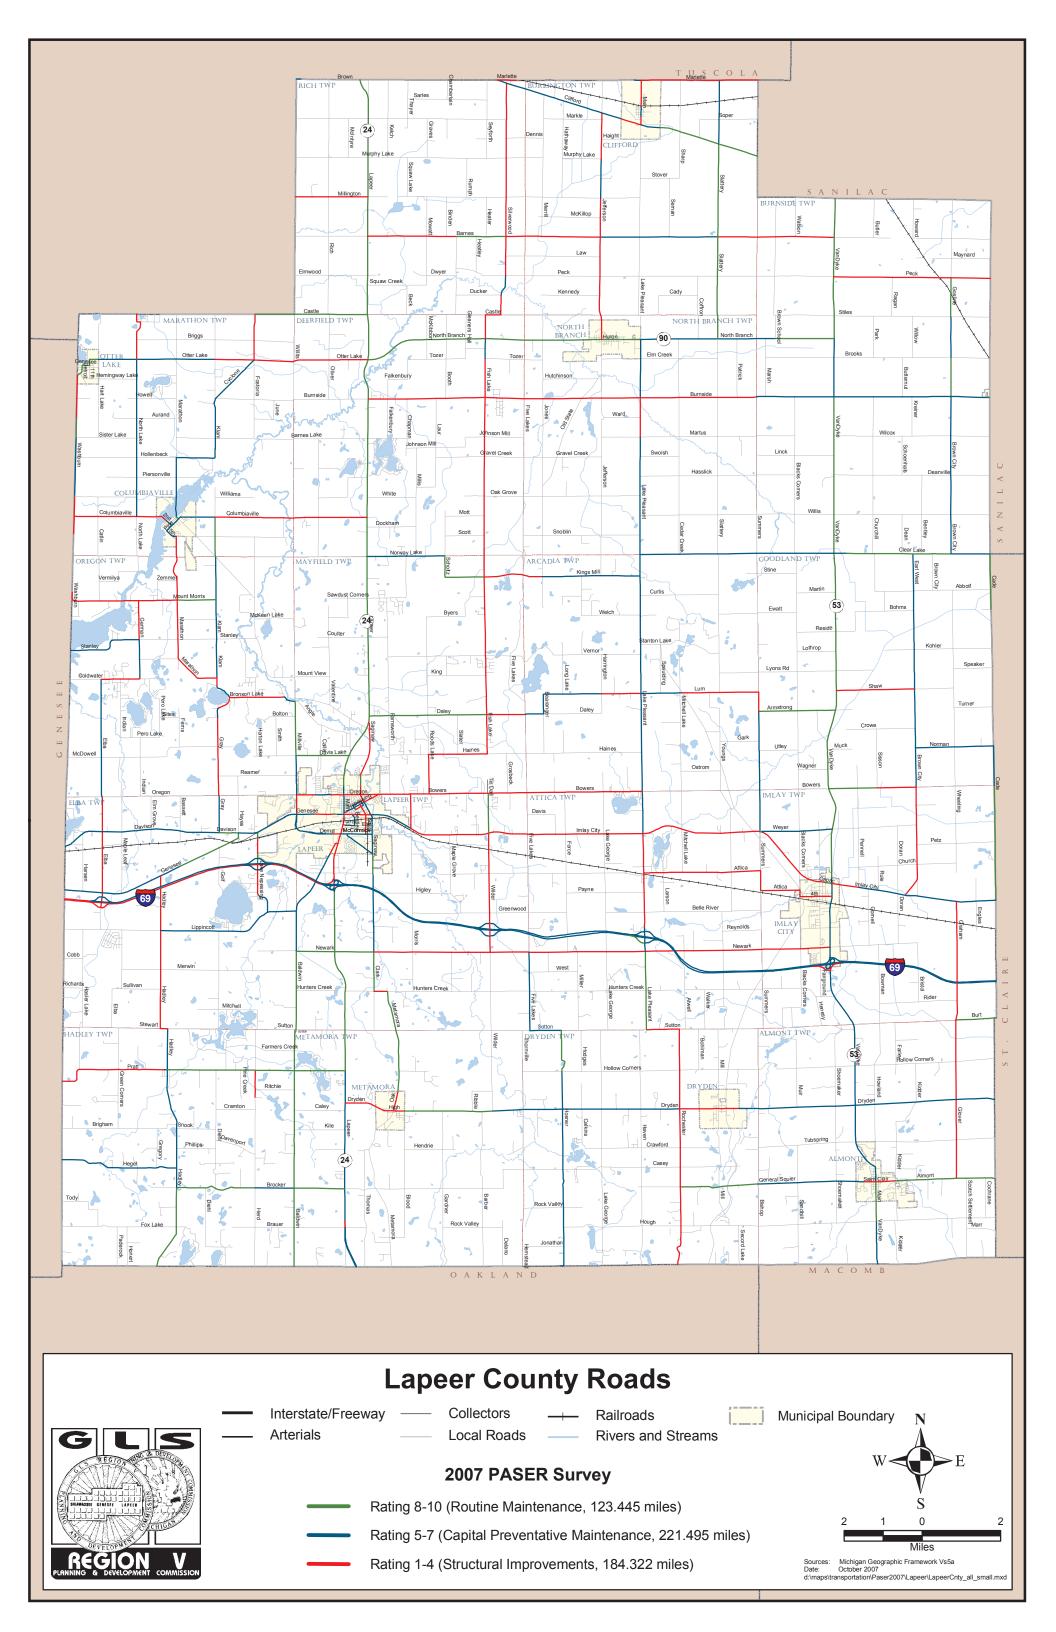

#### **Concrete - PASER Manual Rating System**

## Rating system

Surface rating		Visible distress *	General condition/ Treatment measures
10	Excellent	None	New pavement.  No maintenance required.
9	Excellent	Traffic wear in wheelpath. Slight map cracking or pop-outs.	Recent concrete overlay or join rehabilitation—like new.  No maintenance required.
8	Very Good	Pop-outs, map cracking, or minor surface defects.  Slight surface scaling.  Partial loss of joint sealant.  Isolated meander cracks, tight or well sealed.  Isolated cracks at manholes, tight or well sealed.	More surface wear or slight defects. Recent asphalt overlay. Little or no maintenance required.
7	Good	More extensive surface scaling.  Some open joints.  Isolated transverse or longitudinal cracks, tight or well sealed.  Some manhole displacement and cracking.  First utility patch, in good condition.  First noticeable settement or heave area.	First sign of transverse cracks (all tight) or utility patch.  More extensive surface scaling.  Seal open joints and other routine maintenance.
i	Good	Moderate scaling in several locations.  A few isolated surface spalls.  Shallow reinforcement causing cracks.  Several corner cracks, tight or well sealed.  Open (1/4" wide) longitudinal or transverse joints and more frequent transverse cracks (some open 1/4").	First signs of shallow reinforcement or corner cracking.  Needs general joint and crack sealing.  Scaled areas could be overlaid.

<sup>\*</sup> Note: Individual roadways may not have all of the types of distress listed for any particular rating. They may have only one or two types.

#### Rating system

Sı	urface rating	Visible distress *	General condition/ Treatment measures
5	Fair	Moderate to severe polishing or scaling over 25% of the surface.  High reinforcing steel causing surface spalling.  Some joints and cracks have begun spalling.  First signs of joint or crack faulting (1/4").  Multiple corner cracks with broken pieces.  Moderate settlement or frost heave areas.  Patching showing distress.	First signs of joint or crack spalling or faulting. Grind to repair surface defects. Some partial depth joint repairs needed.
4	Fair	Severe polishing, scaling, map cracking or spalling, over 50% of the area.  Joints and cracks show moderate to severe spalling.  Pumping and faulting of joints (1/2") with fair ride.  Several slabs have multiple transverse or meander cracks with moderate spalling. Spalled area broken into several pieces.  Corner cracks with missing pieces or patches.  Pavement blowups.	Needs some full depth repairs, grinding, and/or asphalt overlay to correct surface defects.
3	Poor	Most joints and cracks are open, with multiple parallel cracks, severe spalling or faulting.  D-cracking is evident.  Severe faulting (1") giving poor ride.  Extensive patching in fair to poor condition.  Many transverse and meander cracks, open and severely spalled.	Needs extensive full depth patching plus some full slab replacement.
2	Very Poor	Extensive slab cracking, severely spalled and patched.  Joints failed.  Patching in very poor condition.  Severe and extensive settlements or frost heaves.	Recycle and/or rebuild pavement.
1	Failed	Restricted speed. Extensive potholes. Almost total loss of pavement integrity.	Total reconstruction.

27

**Asphalt - PASER Manual Rating System** 

Surface Rating	Visible Distress*	General Condition/ Treatment Measures			
	Moderate to severe ravelling (loss of fine and coarse aggregate).				
5 Fair	Longitudinal and transverse cracks (open 1/2") show first signs of slight ravelling and secondary cracks. First signs of longitudinal cracks near pavement edge.	Surface aging, sound structural condition. Needs sealcoat or nonstructural overlay.			
	Block cracking up to 50% of surface.	nonstructural overlay.			
	Extensive to severe flushing or polishing.				
	Some patching or edge wedging in good condition.				
	Severe surface ravelling.				
	Multiple longitudinal and transverse cracking. with slight ravelling.	Significant aging and			
4 Fair	Longitudinal cracking in wheel path.	first signs of need for strengthening. Would			
	Block cracking (over 50% of surface).	benefit from recycling or overlay.			
	Patching in fair condition.				
	Slight rutting or distortions (1/2" deep or less).				
	Closely spaced longitudinal and transverse cracks often showing ravelling and crack erosion.				
	Severe block cracking.	Needs patching and			
3 Poor	Some alligator cracking (less than 25% of surface).	major overlay or complete recycling.			
	Patches in fair to poor condition.				
	Moderate rutting or distortion (1" or 2" deep).				
	Occasional potholes.				
	Alligator cracking (over 25% of surface).	Source details at			
2 Very Poor	Severe distortions (over 2" deep).	Severe deterioration. Needs reconstruction			
	Extensive patching in poor condition.	with extensive base			
1	Potholes.	repair.			
1 Failed	Severe distress with extensive loss of surface integrity.	Failed. Needs total reconstruction.			

<sup>\*</sup> Note: Individual pavements will not have all of the types of distress listed for any particular rating. They may have only one or two types.

19

#### Rating System

Surface Rating		Surface Rating		Surface Rating		Visible Distress*	General Condition/ Treatment Measures
10	Excellent	None.	New construction.				
9	Excellent	None.	Recent overlay, like new				
		No longitudinal cracks except reflection of paving joints.					
8	Very Good	Occasional transverse cracks, widely spaced (40' or greater).	Recent sealcoat or new road mix. Little or no				
		All cracks sealed or tight (open 1/4" or less).	maintenance required.				
		Very slight or no ravelling, surface shows some traffic wear.					
7	Good	Longitudinal cracks (open 1/4") due to reflection or paving joints.	First signs of aging.  Maintain with routine				
		Transverse cracks (open 1/4") spaced 10 feet or more apart, little or slight crack ravelling.	crack filling.				
		No patching or very few patches in excellent condition.					
		Slight ravelling (loss of fines) and traffic wear.					
	×	Longitudinal cracks (open 1/4"-1/2") due to reflection and paving joints.	Show signs of aging,				
6	Good	Transverse cracking (open 1/4" to 1/2") some spaced less than 10 feet.	sound structural condition. Could extend				
		First sign of block cracking.	life with sealcoat.				
		Slight to moderate flushing or polishing.					
		Occasional patching in good condition.					
		* Note: Individual pavements will not have all of the					

#### **Concrete - PASER Manual Rating System**

## Rating system

Surface rating		Visible distress *	General condition/ Treatment measures
10	Excellent	None	New pavement.  No maintenance required.
9	Excellent	Traffic wear in wheelpath. Slight map cracking or pop-outs.	Recent concrete overlay or join rehabilitation—like new.  No maintenance required.
3	Very Good	Pop-outs, map cracking, or minor surface defects.  Slight surface scaling.  Partial loss of joint sealant.  Isolated meander cracks, tight or well sealed.  Isolated cracks at manholes, tight or well sealed.	More surface wear or slight defects.  Recent asphalt overlay.  Little or no maintenance required.
7	Good	More extensive surface scaling.  Some open joints. Isolated transverse or longitudinal cracks, tight or well sealed.  Some manhole displacement and cracking.  First utility patch, in good condition.  First noticeable settement or heave area.	First sign of transverse cracks (all tight) or utility patch.  More extensive surface scaling Seal open joints and other routine maintenance.
ì	Good	Moderate scaling in several locations.  A few isolated surface spalls.  Shallow reinforcement causing cracks.  Several corner cracks, tight or well sealed.  Open (1/4" wide) longitudinal or transverse joints and more frequent transverse cracks (some open 1/4").	First signs of shallow reinforcement or corner cracking.  Needs general joint and crack sealing.  Scaled areas could be overlaid.

<sup>\*</sup> Note: Individual roadways may not have all of the types of distress listed for any particular rating. They may have only one or two types.

#### Rating system

Surface rating		Visible distress *	General condition/ Treatment measures
5	Fair	Moderate to severe polishing or scaling over 25% of the surface.  High reinforcing steel causing surface spalling.  Some joints and cracks have begun spalling.  First signs of joint or crack faulting (1/4").  Multiple corner cracks with broken pieces.  Moderate settlement or frost heave areas.  Patching showing distress.	First signs of joint or crack spalling or faulting. Grind to repair surface defects. Some partial depth joint repairs needed.
4	Fair	Severe polishing, scaling, map cracking or spalling, over 50% of the area.  Joints and cracks show moderate to severe spalling.  Pumping and faulting of joints (1/2") with fair ride.  Several slabs have multiple transverse or meander cracks with moderate spalling. Spalled area broken into several pieces.  Corner cracks with missing pieces or patches.  Pavement blowups.	Needs some full depth repairs, grinding, and/or asphalt overlay to correct surface defects.
3	Poor	Most joints and cracks are open, with multiple parallel cracks, severe spalling or faulting.  D-cracking is evident.  Severe faulting (1") giving poor ride.  Extensive patching in fair to poor condition.  Many transverse and meander cracks, open and severely spalled.	Needs extensive full depth patching plus some full slab replacement.
2	Very Poor	Extensive slab cracking, severely spalled and patched.  Joints failed.  Patching in very poor condition.  Severe and extensive settlements or frost heaves.	Recycle and/or rebuild pavement.
1	Failed	Restricted speed. Extensive potholes. Almost total loss of pavement integrity.	Total reconstruction.

27

**Asphalt - PASER Manual Rating System** 

Surface Rating	Visible Distress*	General Condition/ Treatment Measures
	Moderate to severe ravelling (loss of fine and coarse aggregate).	Surface aging, sound structural condition. Needs sealcoat or nonstructural overlay.
5 Fair	Longitudinal and transverse cracks (open 1/2") show first signs of slight ravelling and secondary cracks. First signs of longitudinal cracks near pavement edge.	
	Block cracking up to 50% of surface.	
	Extensive to severe flushing or polishing.	
	Some patching or edge wedging in good condition.	
	Severe surface ravelling.	Significant aging and first signs of need for strengthening. Would benefit from recycling or overlay.
	Multiple longitudinal and transverse cracking. with slight ravelling.	
4 Fair	Longitudinal cracking in wheel path.	
	Block cracking (over 50% of surface).	
	Patching in fair condition.	
	Slight rutting or distortions (1/2" deep or less).	
	Closely spaced longitudinal and transverse cracks often showing ravelling and crack erosion.	Needs patching and major overlay or complete recycling.
	Severe block cracking.	
3 Poor	Some alligator cracking (less than 25% of surface).	
	Patches in fair to poor condition.	
	Moderate rutting or distortion (1" or 2" deep).	
	Occasional potholes.	
	Alligator cracking (over 25% of surface).	Severe deterioration. Needs reconstruction with extensive base repair.
2 Very Poor	Severe distortions (over 2" deep).	
	Extensive patching in poor condition.	
	Potholes.	
1 Failed	Severe distress with extensive loss of surface integrity.	Failed. Needs total reconstruction.

<sup>\*</sup> Note: Individual pavements will not have all of the types of distress listed for any particular rating. They may have only one or two types.

19

#### Rating System

Surface Rating		Visible Distress*	General Condition/ Treatment Measures
10	Excellent	None.	New construction.
9	Excellent	None.	Recent overlay, like new
	Very Good	No longitudinal cracks except reflection of paving joints.	Recent sealcoat or new road mix. Little or no maintenance required.
8		Occasional transverse cracks, widely spaced (40' or greater).	
		All cracks sealed or tight (open 1/4" or less).	
	Good	Very slight or no ravelling, surface shows some traffic wear.	First signs of aging. Maintain with routine crack filling.
7		Longitudinal cracks (open 1/4") due to reflection or paving joints.	
		Transverse cracks (open 1/4") spaced 10 feet or more apart, little or slight crack ravelling.	
		No patching or very few patches in excellent condition.	
	Good	Slight ravelling (loss of fines) and traffic wear.	Show signs of aging, sound structural condition. Could extend life with sealcoat.
		Longitudinal cracks (open 1/4"-1/2") due to reflection and paving joints.	
6		Transverse cracking (open 1/4" to 1/2") some spaced less than 10 feet.	
		First sign of block cracking.	
		Slight to moderate flushing or polishing.	
		Occasional patching in good condition.	
		* Note: Individual pavements will not have all of the	